

Mysolar

STAR HC M144

PERC HALF CELL
MONO MODULE
375-400W

POSITIVE TOLERANCE 0~+6W
PERC HALF CELL MONO 144

New Energy, Smart Living




WHY MYSOLAR?



MBB Solar Cells

Mysolar panels have multi-busbars that can reduce current heat loss of the cells and increase the current collection ability.



Strong and Safe

Mysolar panels are certified to withstand 2400 Pa negative load of wind and 5400 Pa positive load of snow.



1500V System Voltage

Mysolar panels are of 1500V system voltage design compatible to 1000V/1500V and reduces BoS cost greatly.



PID-Resistant

Mysolar panels are PID-resistant which were tested to the industry's most rigorous durability standards in accordance to IEC 62804.



Better Low Light Output

Mysolar uses the best solar glass, cells, and assembling technology to guarantee good performance in cloudy days or low light conditions.



Salt-resistant & Ammonia-Resistant

Mysolar solar panels are salt mist and ammonia resistance certified.



Positive Tolerance

Mysolar guarantees that all solar modules manufactured by Mysolar have 0~6W positive tolerance.



Confident Warranty

Mysolar offers 12 years limited product warranty and 25 years performance warranty for all the solar modules.




Higher Output

With multi-busbar (5BB) cells, and 1500V system voltage, super solar glass, Mysolar panels have higher output than its competitors'.




High Reliability

Mysolar has complete testing facilities for tests of UV, TC, HF, EL, etc tests. 100% of Mysolar panels were tested & minimally twice EL tests guaranteed.

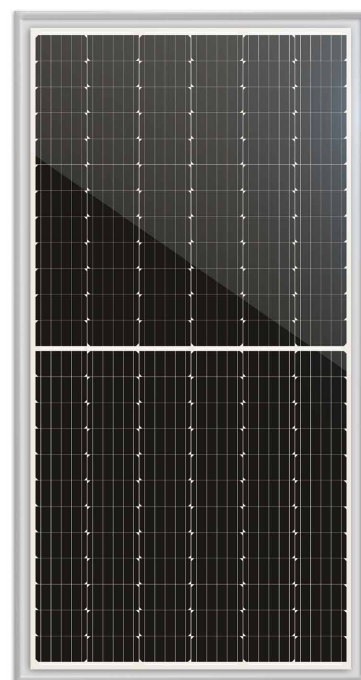

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty · 25 Year Linear Power Warranty

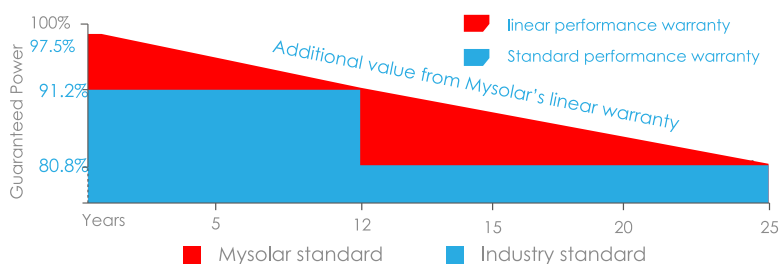

- ISO9001:2015 Quality management systems
- ISO14001: 2015 Quality management systems
- OHSAS18001: 2018 Occupational health and safety management systems
- IEC61215, IEC61730, UL1703 certified product



SPECIFICATIONS

Module Type	MS375M-H	MS380M-H	MS385M-H	MS390M-H	MS395M-H	MS400M-H
	STC	STC	STC	STC	STC	STC
Maximum Power (Pmax)	375Wp	380Wp	385Wp	390Wp	395Wp	400Wp
Maximum Power Voltage (Vmp)	39.50V	39.80V	40.00V	40.20V	40.40V	40.60V
Maximum Power Current (Imp)	9.49A	9.55A	9.63A	9.71A	9.79A	9.85A
Open-circuit Voltage (Voc)	48.19V	48.56V	48.80V	49.05V	49.30V	49.55V
Short-circuit Current (Isc)	10.06A	10.11A	10.19A	10.29A	10.38A	10.47A
Module Efficiency STC (%)	18.90%	19.15%	19.41%	19.66%	19.91%	19.99%
Operating Temperature (°C)	-40°C~+85°C					
Maximum System Voltage	1500VDC (IEC)					
Maximum Series Fuse Rating	15A					
Power Tolerance	0~+6W					
Temperature Coefficients of Pmax	-0.39%/°C					
Temperature Coefficients of Voc	-0.29%/°C					
Temperature Coefficients of Isc	0.05%/°C					
Nominal Operating Cell Temperature (NOCT)	45±2°C					


STC: Irradiance 1000W/sqm Cell Temp: 25 °C AM=1.5

NOCT: Irradiance 800W/sqm Ambient Temp: 20 °C AM=1.5 Wind Speed 1m/s


* Power measurement tolerance: -/+3%

Characteristics and Operating Temperature


Current-Voltage Curve in Various Light Levels

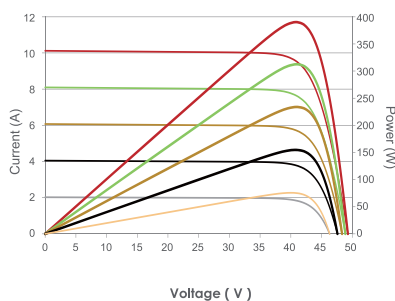

Output in Various Temp Conditions



Mechanical Diagrams

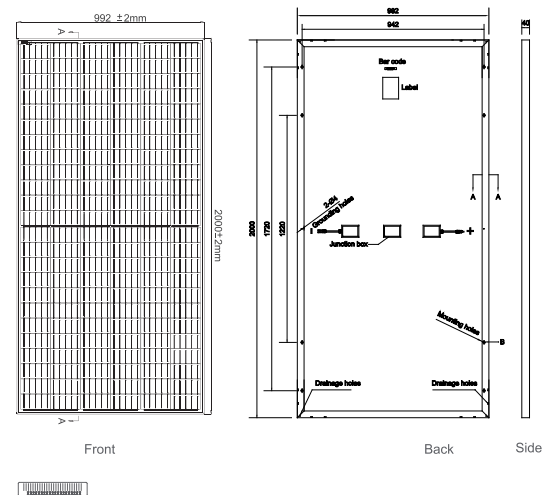

Mechanical Characteristics

Cell Type	Mono PERC 156.75×78.375mm 5/6/9/12BB
No. of cells	144 (6×12+6×12)
Dimensions	2000×992×40mm (78.74×39.06×1.57 inch)
Weight	23kg (50.7 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67/IP68 Rated, 3 diodes
Cable & Connector	4mm ² cable MC4 Compatible

Packaging Info

(Two pallets = One stack)

27pcs/pallet, 54pcs/stack, 594pcs/40'HQ Container, 270pcs/20'GP

Mysolar reserves the right to make necessary adjustment to the information described herein at any time without further notice due to continuous innovation and product improvement. Please be kindly noted installation of Mysolar solar modules shall be done by professional skilled people. Please read the installation manual carefully before using Mysolar solar panels.

Mysolar is a **Mamibot** company and brand. **Mysolar** and **Mamibot** are trademarks of Mamibot Manufacturing USA Inc.

Mamibot Manufacturing USA Inc.

www.mamibot.com Tel: 001 302 428 9888 sales@mamibot.com Head Office: Orange St. #600, Wilmington, New Castle, 19899, Delaware, USA

Mysolar Manufacturing (Shanghai) Co., Ltd.

www.mamibot.com/mysolar Tel: 0086 21 62147369 North Part, 21ST Fl, No.1, LN1040, Caoyang Rd, Putuo Dist, Shanghai, P.R.C.